


Hydrocyclones (or cyclonic filters) are very simple equipment used to separate sand and water. They provide an efficient prefiltration of well water. They ask few maintenance : they must be drained about one time a year.



How it works

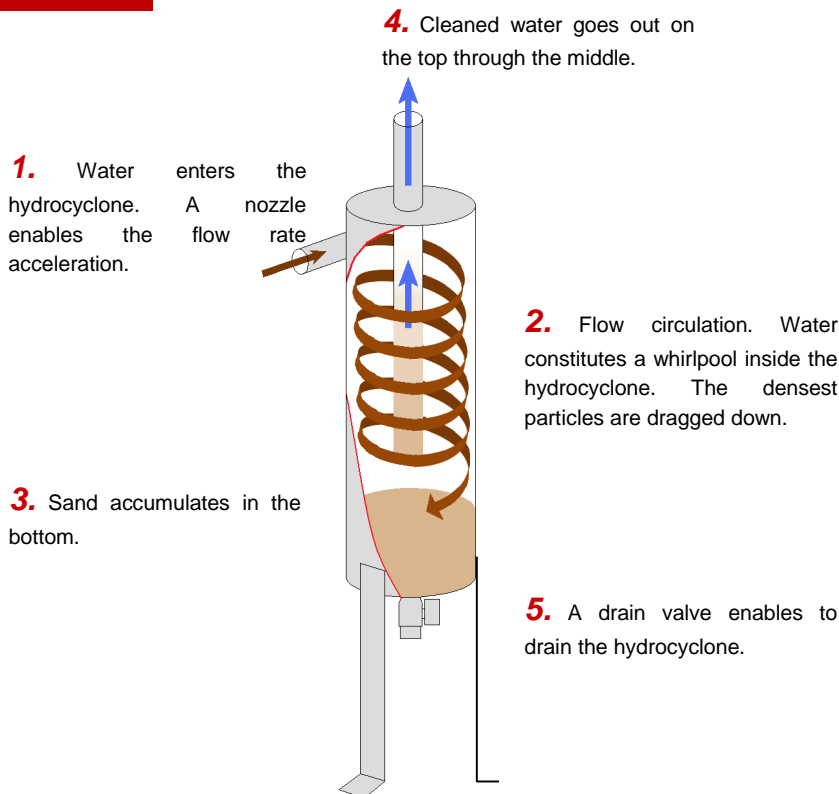

Max. pressure : **6 Bar**
 Construction material : **stainless steel**
 Pressure loss : **0,2 to 0,5 Bar**

Availables types :

Type	Flow rate (m ³ /h)	Nozzles	Nozzles (mm)	Total height (mm)
IC 100 3/4"	3 to 6	3/4" BSP thread	20/27	760
IC 100 1"	6 to 10	1" BSP thread	26/34	850
IC 100 1 1/4"	10 to 14	1 1/4" BSP thread	33/42	900